

# ANSI Switchboard Meters

High quality range of switchboard instruments with Class 1 accuracy and which complies with American ANSI-C39.1 (1981) specifications. Available in 4 1/2" case size, the rugged design characteristics meet the needs of the most demanding environmental applications. This extensive range of analog and digital/analog meters utilizes high shock and provides 1% accuracy for all RMS AC and DC ranges. The range offers various customized options and features.

## Description

Our Switchboard Meter series offers two case types; models 007 and 078.

Model 078 is high shock hermetically sealed and all models have heavy gauge pressed steel cases. Mounting is by four integral studs. Model 078 has a die-cast bezel and a projecting moulded toughened glass window, which incorporates a gas tight zero adjuster.

Model 007 is a one piece flame retardant polycarbonate moulding with a black matte finished bezel area, and a specially contoured window to minimize reflection from adjacent light sources.

Scales are 240° moving iron and 250° moving coil with parallax error-free platform dials. Standard dials are white matte with black printed scales and bar knife-edge pointers.

## Specifications

|                                  |   |
|----------------------------------|---|
| <b>Performance</b>               | ANSI C39.1 (1981)   |
| <b>Accuracy</b>                  | Class 1   |
| <b>Terminals</b>                 | 10 - 32 UNF terminals   |
| <b>Response time</b>             | Approximately 2.5 seconds to full scale (007 and 078)   |
| <b>Dielectric voltage</b>        | Withstand test 2.3 kV for 1 minute  |
| <b>Standard calibration</b>      | 23°C  |
| <b>Operating temperature</b>     | 0°C to +60°C. Model 078: -40°C to +70°C   |
| <b>Storage temperature</b>       | -10°C to +50°C  |
| <b>Extreme temperature range</b> | -20°C to +65°C  |
| <b>Enclosure integrity</b>       | Model 007 to IP54 (NEMA 3S) splash proof,<br>to IP67 (NEMA 6 and 6P) <span style="float: right;">Model 078</span> |
| <b>Fixing on panel</b>           | 4 integral 1/4 -28 UNF fixing studs   |
| <b>Certifications</b>            | c-UL-us, CE <span style="float: right;">Model 078=CE Only</span>  |

## Dimensions (in inches)

| Model                     | Panel Cutout |      |      | Rear View |      | Side View |      |      |
|---------------------------|--------------|------|------|-----------|------|-----------|------|------|
|                           | Dia          | A    | B    | C         | D    | E         | F    | G    |
| 007 (Amps, Volts & Freq.) | 4.06         | 3.37 | 1.69 | 4.31      | 0.65 | 2.41      | -    | 4.05 |
| 007 Others                | 4.06         | 3.37 | 1.69 | 4.31      | 0.65 | -         | 0.91 | 4.05 |
| 078                       | 4.06         | 3.37 | 1.69 | 4.31      | 0.63 | -         | 0.91 | 4.05 |


Dimension E on 007 others and 078 products varies with measured parameter. See product code on following page.

Dimension F on 078 (Amps, Volts & Freq.) products is included with dimension E.


1-4 Fixing holes Ø 8mm. 2-1/4-28 UNF fixing studs. 3-10-32 UNF terminals.



## 007 Power and 078

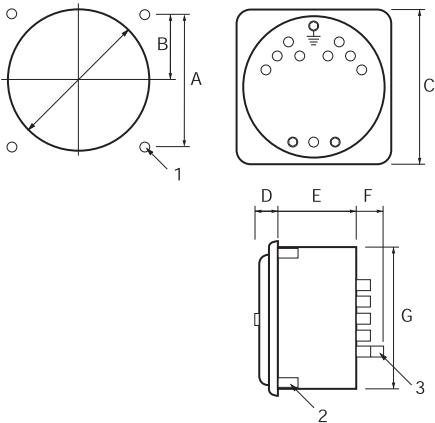

## 007 AMPs | Volts | Frequency Only

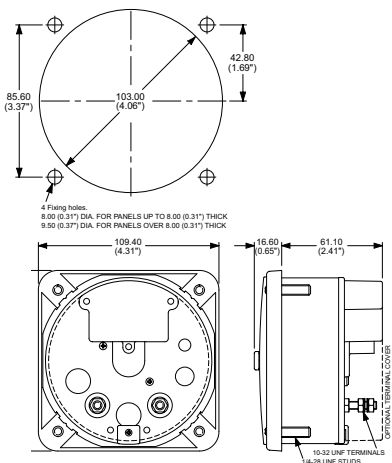

### Features

- Rugged pivot and jewel movement
- Class 1 accuracy

### Benefits

- Meets all the requirements of ANSI-C39.1 (1981)
- Parallax error-free platform dials
- Bump, shock and vibration proof
- Customized options and features

### Applications

- Switchgear
- Distribution systems
- Generator sets
- Control panels
- Energy management
- Building management
- Utility power monitoring
- Process control
- Motor control

### Certifications



Model 078= CE only

| Type of instrument                       | Ranges                           | Dimension E |     | Product code            |
|--|----------------------------------|-------------|-----|-------------------------|
|  |                                  | 007         | 078 |                         |
| AC rectified ammeter                     | 1 - 30A                          | 56          | 86  | 007/078-05B             |
| AC rectified voltmeter                   | 30 - 800V                        | 56          | 86  | 007/078-05W             |
| AC voltmeter expanded scale              | 110 - 130V                       | 86          | 86  | 007/078-05Y             |
| AC RMS ammeter                           | 1 - 30A                          | 56          | 86  | 007/078-05F             |
| AC RMS voltmeter                         | 150 - 750V                       | 56          | 86  | 007/078-05G             |
| Elapsed time meter (99999.99)            | 50 or 60Hz / 100 - 440V* and DC  | 56          | 56  | 007/078-155/156/077-151 |
| Frequency meter                          | 50, 60                           | 86          | 86  | 007/078-41L             |
| AC wattmeter or VArmeter                 | 0.2 - 10A/100 - 440V*            | 132         | 132 | 007/078-21 or 31        |
| LED synchroscope only                    | 63.5 - 480V****                  | 86          | -   | 077-14A                 |
| LED synchroscope and synchro check relay | 63.5 - 480V****                  | 86          | -   | 077-14 L/G/D/U          |
| Phase sequence indicator                 | 100 - 150, 151 - 300, 301 - 500V | 56          | -   | 077-12P                 |
| Transducer operated indicator            | 1, 5, 10, 20, or 4/20mA          | 56          | 56  | 007/078-05              |
| DC ammeter moving coil                   | 200QA - 30A 56                   | 56          | 56  | 007/078-05A             |
| DC voltmeter moving coil                 | 50mV - 600V 56                   | 56          | 56  | 007/078-05V             |
| 240° phase angle   power factor          | 1 or 5A, 100 - 400V, 50, 60      | 132         | 132 | 007/078-42              |
| DIGI/Analog AC ammeter                   | 1mA - 10A                        | 86          | -   | 007-DIB                 |
| DIGI/Analog AC voltmeter                 | 200mV - 600V                     | 86          | -   | 007-DIW                 |
| DIGI/Analog DC ammeter                   | 1mA - 1A                         | 86          | -   | 007-DIA                 |
| DIGI/Analog DC voltmeter                 | 20mV - 600V                      | 86          | -   | 007-DIV                 |
| DIGI/Analog transducer indicator         | DC mA                            | 86          | -   | 007-DIT                 |
| DIGI/Analog tachometer                   | AC or DC rated                   | 86          | -   | 007-DI2                 |

\* 100-440V = (100/125, 200/250, 380/440).

\*\*100-440V = (100/125, 200/250, 380/440). Frequencies 45/55, 55/65, 45/65, 46/54, 50/70, 58/62, 56/64.

\*\*\*\*Nominal voltage to be specified.

# AC Wattmeters and VArmeters



The Crompton Instruments Switchboard series of AC Wattmeters and VArmeters incorporate a DC moving coil, pivot and jewel indicator with a micro-circuit watt transducer PCB to read power on single or three-phase systems. The most frequently selected wattmeter scale marking for common current and voltage transformers are listed on the following pages. In addition, these instruments may be supplied with zero-left or center-zero scale.

## Scaling

Wattmeter and VArmeter current circuits should have equal carrying capacity because they are frequently connected in series. This means that the sum of the left and right end-scale values of the VArmeters should be equal to or greater than the full scale value of the Wattmeter (or have higher end-scale values if the instruments are center or offset-zero). Instruments measuring 10,000 kilowatts and over are marked in megawatts. Center-zero or offset-zero Watt and VArmeters are marked "IN" for left deflection and "OUT" for right deflection. On ordering, Wattmeter and VArmeter scales will be calculate, the nearest preferred scale will be offered from the charts on the following pages. Custom scales are available but at an extra cost.

## Calibration

For full load value of Watts or VAr, assuming unity power factor:

1-phase 2-wire Watts = amps x volts

3-phase 3-wire Watts = amps x line-to-line volts x  $\sqrt{3}$

3-phase 4-wire Watts = amps x line-to-neutral volts x 3

Minimum scale values are obtained by multiplying resultant Watts, using the above formula x 0.7 and selecting next higher standard scale.

For maximum scale value, multiply x 1.3 and select the next lowest standard.

If scale calculates to an exact listed value, use this value rather than the next higher or lower value.

**Note:** When ordering Wattmeters and VArmeters, please specify CT ratio, VT ratio and required scale.

## Specifications

|                               |  |
|-------------------------------|--|
| <b>Burden per element</b>     | Current circuit: 2VA   Voltage Circuit: 1VA  |
| <b>Accuracy</b>               | Class 1.0  |
| <b>Ambient range</b>          | 0° to $\pm 60^\circ$ (32° to 104°F) std. calibration 20°C (68°F)                                     |
| <b>Ambient influence</b>      | 0.05% per 1°C maximum  |
| <b>Overloads-current</b>      | 10 x rating for 5 seconds, 1.2 x continuously  |
| <b>Voltage influence</b>      | 2 x rating for 5 seconds, 1.2 x continuously voltage<br>Accuracy maintained, 80 - 110% rated voltage |
| <b>Power factor influence</b> | Accuracy maintained, 0.1 lag to 0.1 lead   |
| <b>Enclosure code</b>         | 007 IP54 optional IP55   078 IP67  |
| <b>Response time</b>          | 007 and 078 approximately 2.5 seconds  |
| <b>Dielectric withstand</b>   | Live parts to case including panel 2600V RMS for 1 minute  |

# Wattmeter | VArmeter Scale Selector Guide

|  |       |          |       |       |       |        |        |        |        |        |        |        |
|--|-------|----------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|
| Primary potential transformer voltage system | 120   | 208      | 240   | 480   | 600   | 2400   | 3600   | 4200   | 4800   | 6000   | 7200   | 8400   |
|  | (1:1) | (1.73:1) | (2:1) | (4:1) | (5:1) | (20:1) | (30:1) | (35:1) | (40:1) | (50:1) | (60:1) | (70:1) |
| 3-phase 3-wire (L-L) system voltage          | 120   | 208      | 240   | 480   | 600   | 2400   | 3600   | 4200   | 4800   | 6000   | 7200   | 8400   |
| 3-phase 4-wire (L-N) current transformer     | 69    | 120      | 139   | 277   | 347   | 1390   | 2100   | 2400   | 2770   | 3500   | 4160   | 4800   |

|                             |        |        |        |        |        |        |        |        |        |        |        |        |        |
|-----------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| RATIO<br>25/5<br>(5:1)      | Normal | 5KW    | 10KW   | 10KW   | 20KW   | 25KW   | 100KW  | 150KW  | 175KW  | 200KW  | 250KW  | 300KW  | 350KW  |
|                             | Max.   | 6      | 10     | 12     | 25     | 30     | 120    | 200    | 200    | 250    | 300    | 400    | 450    |
|                             | Min.   | 3      | 5      | 6      | 12.5   | 15     | 60     | 100    | 100    | 125    | 150    | 200    | 225    |
| RATIO<br>50/5<br>(10:1)     | Normal | 10KW   | 20KW   | 20KW   | 40KW   | 50KW   | 200KW  | 300KW  | 350KW  | 400KW  | 500KW  | 600KW  | 700KW  |
|                             | Max.   | 12     | 20     | 25     | 50     | 60     | 250    | 400    | 450    | 500    | 600    | 800    | 900    |
|                             | Min.   | 6      | 10     | 12.5   | 25     | 30     | 125    | 200    | 250    | 250    | 300    | 400    | 450    |
| RATIO<br>75/5<br>(15:1)     | Normal | 15KW   | 25KW   | 30KW   | 60KW   | 75KW   | 300KW  | 500KW  | 500KW  | 600KW  | 750KW  | 900KW  | 1000KW |
|                             | Max.   | 20     | 30     | 40     | 80     | 100    | 400    | 600    | 700    | 800    | 1000   | 1200   | 1200   |
|                             | Min.   | 10     | 15     | 20     | 40     | 50     | 200    | 300    | 350    | 400    | 500    | 600    | 600    |
| RATIO<br>100/5<br>(20:1)    | Normal | 20KW   | 30KW   | 40KW   | 75KW   | 100KW  | 400KW  | 600KW  | 700KW  | 800KW  | 1000KW | 1200KW | 1200KW |
|                             | Max.   | 25     | 40     | 50     | 100    | 120    | 500    | 800    | 900    | 1000   | 1200   | 1500   | 1500   |
|                             | Min.   | 12.5   | 20     | 25     | 50     | 60     | 250    | 400    | 450    | 500    | 600    | 750    | 750    |
| RATIO<br>150/5<br>(30:1)    | Normal | 30KW   | 50KW   | 50KW   | 100KW  | 150KW  | 600KW  | 800KW  | 1000KW | 1200KW | 1500KW | 1800KW | 2000KW |
|                             | Max.   | 40     | 70     | 75     | 150    | 200    | 800    | 1200   | 1200   | 1500   | 2000   | 2400   | 2500   |
|                             | Min.   | 20     | 35     | 35     | 75     | 100    | 400    | 600    | 600    | 750    | 1000   | 1000   | 1250   |
| RATIO<br>200/5<br>(40:1)    | Normal | 40KW   | 75KW   | 75KW   | 150KW  | 200KW  | 800KW  | 1200KW | 1200KW | 1500KW | 2000KW | 2500KW | 3000KW |
|                             | Max.   | 50     | 80     | 100    | 200    | 250    | 1000   | 1500   | 1500   | 2000   | 2500   | 3000   | 3500   |
|                             | Min.   | 25     | 40     | 50     | 100    | 125    | 500    | 750    | 750    | 1000   | 1250   | 1500   | 1500   |
| RATIO<br>300/5<br>(60:1)    | Normal | 70KW   | 100KW  | 100KW  | 200KW  | 300KW  | 1200KW | 1500KW | 2000KW | 2500KW | 3000KW | 3500KW | 4500KW |
|                             | Max.   | 75     | 120    | 150    | 300    | 400    | 1500   | 2000   | 2500   | 3000   | 4000   | 4000   | 5000   |
|                             | Min.   | 35     | 60     | 75     | 150    | 200    | 750    | 1000   | 1250   | 1500   | 2000   | 2000   | 2500   |
| RATIO<br>400/5<br>(80:1)    | Normal | 75KW   | 125KW  | 150KW  | 300KW  | 400KW  | 1500KW | 2500KW | 3000KW | 3000KW | 4000KW | 5000KW | 6000KW |
|                             | Max.   | 100    | 150    | 200    | 400    | 500    | 2000   | 3000   | 3600   | 4000   | 5000   | 6000   | 7000   |
|                             | Min.   | 50     | 75     | 100    | 200    | 250    | 1000   | 1500   | 1500   | 2000   | 2500   | 3000   | 3500   |
| RATIO<br>600/5<br>(120:1)   | Normal | 125KW  | 200KW  | 200KW  | 450KW  | 600KW  | 2000KW | 3000KW | 4000KW | 5000KW | 6000KW | 7500KW | 8000KW |
|                             | Max.   | 150    | 250    | 300    | 600    | 800    | 3000   | 4000   | 5000   | 6000   | 8000   | 8000   | 10MW   |
|                             | Min.   | 75     | 125    | 150    | 300    | 400    | 1500   | 2000   | 2500   | 3000   | 4000   | 4000   | 5000KW |
| RATIO<br>800/5<br>(160:1)   | Normal | 150KW  | 250KW  | 300KW  | 600KW  | 800KW  | 3000KW | 5000KW | 6000KW | 6000KW | 8000KW | 10MW   | 12MW   |
|                             | Max.   | 200    | 350    | 400    | 800    | 1000   | 4000   | 6000   | 7500   | 8000   | 10MW   | 12MW   | 15MW   |
|                             | Min.   | 100    | 175    | 200    | 400    | 500    | 2000   | 3000   | 3000   | 4000   | 5000KW | 6000KW | 7500KW |
| RATIO<br>1000/5<br>(200:1)  | Normal | 200KW  | 350KW  | 400KW  | 800KW  | 1000KW | 4000KW | 6000KW | 6000KW | 8000KW | 10MW   | 12MW   | 15MW   |
|                             | Max.   | 250    | 450    | 500    | 1000   | 1200   | 5000   | 8000   | 8000   | 10MW   | 12MW   | 15MW   | 18MW   |
|                             | Min.   | 125    | 225    | 250    | 500    | 600    | 2500   | 4000   | 4000   | 5000KW | 6000KW | 7500KW | 10MW   |
| RATIO<br>1200/5<br>(240:1)  | Normal | 250KW  | 400KW  | 500KW  | 1000KW | 1200KW | 5000KW | 7000KW | 8000KW | 10MW   | 12MW   | 15MW   | 10MW   |
|                             | Max.   | 300    | 500    | 600    | 1200   | 1500   | 6000   | 8000   | 10MW   | 12MW   | 15MW   | 18MW   | 20MW   |
|                             | Min.   | 150    | 250    | 300    | 600    | 750    | 3000   | 4000   | 5000KW | 6000KW | 7500KW | 10MW   | 10MW   |
| RATIO<br>1500/5<br>(300:1)  | Max.   | 300KW  | 500KW  | 600KW  | 1200KW | 1500KW | 6000KW | 10MW   | 10MW   | 12MW   | 15MW   | 20MW   | 20MW   |
|                             | Max.   | 400    | 700    | 750    | 1500   | 2000   | 8000   | 12     | 12     | 15     | 20     | 20     | 25     |
|                             | Min.   | 200    | 350    | 375    | 1000   | 1000   | 4000   | 6000KW | 6000KW | 7500KW | 10MW   | 10MW   | 12.5   |
| RATIO<br>2000/5<br>(400:1)  | Normal | 400KW  | 750KW  | 800KW  | 1600KW | 2000KW | 8000KW | 12MW   | 12MW   | 15MW   | 20MW   | 25MW   | 30MW   |
|                             | Max.   | 500    | 800    | 1000   | 2000   | 2500   | 10MW   | 15     | 15     | 20     | 25     | 30     | 35     |
|                             | Min.   | 250    | 400    | 500    | 750    | 1250   | 5000   | 7500KW | 7500KW | 10MW   | 12.5   | 15     | 20     |
| RATIO<br>3000/5<br>(600:1)  | Normal | 750KW  | 1000KW | 1200KW | 2000KW | 3000KW | 12MW   | 18MW   | 20MW   | 25MW   | 30MW   | 35MW   | 40MW   |
|                             | Max.   | 800    | 1200   | 1500   | 3000   | 4000   | 15     | 20     | 25     | 30     | 40     | 40     | 50     |
|                             | Min.   | 400    | 600    | 750    | 1500   | 2000   | 7500KW | 10     | 12.5   | 15     | 20     | 20     | 25     |
| RATIO<br>4000/5<br>(800:1)  | Normal | 800KW  | 1200KW | 1500KW | 3000KW | 4000KW | 15MW   | 20MW   | 25MW   | 30MW   | 40MW   | 50MW   | 50MW   |
|                             | Max.   | 1000   | 1500   | 2000   | 4000   | 5000   | 20     | 30     | 30     | 40     | 50     | 60     | 75     |
|                             | Min.   | 500    | 750    | 1000   | 2000   | 2500   | 10     | 15     | 15     | 20     | 25     | 30     | 40     |
| RATIO<br>5000/5<br>(1000:1) | Normal | 1000KW | 1500KW | 2000KW | 4000KW | 5000KW | 20MW   | 30MW   | 20MW   | 40MW   | 50MW   | 60MW   | 75MW   |
|                             | Max.   | 1250   | 2000   | 2500   | 5000   | 6000   | 25     | 40     | 25     | 50     | 60     | 80     | 80     |
|                             | Min.   | 500    | 1000   | 1250   | 2500   | 3000   | 12.5   | 20     | 12.5   | 25     | 30     | 40     | 40     |
| RATIO<br>6000/5<br>(1200:1) | Normal | 1200KW | 2000KW | 2500KW | 5000KW | 6000KW | 25MW   | 35MW   | 40MW   | 50MW   | 60MW   | 60MW   | 80MW   |
|                             | Max.   | 1500   | 2500   | 3000   | 6000   | 8000   | 30     | 40     | 50     | 60     | 80     | 80     | 100    |
|                             | Min.   | 750    | 1250   | 1500   | 3000   | 4000   | 15     | 20     | 25     | 30     | 40     | 40     | 50     |

# Wattmeter | VArmeter Scale Selector Guide

| Primary potential transformer voltage system |                  | 12kV                     | 14.4kV                 | 24kV                   | 34.5kV                 | 38kV                   | 46kV                     | 92kV                     | 115kV                 | 138kV                 | 345kV                  | 765kV                   |
|--|------------------|--------------------------|------------------------|------------------------|------------------------|------------------------|--------------------------|--------------------------|-----------------------|-----------------------|------------------------|-------------------------|
|  |                  | (100:1)                  | (120:1)                | (200:1)                | (300:1)                | (330:1)                | (400:1)                  | (800:1)                  | (1000:1)              | (1200:1)              | (3000:1)               | (6000:1)                |
| 3-phase 3-wire (L-L) system voltage          |                  | 12KV                     | 14.4kV                 | 24kV                   | 34.5kV                 | 38kV                   | 46kV                     | 92kV                     | 115kV                 | 138kV                 | 345kV                  | 765kV                   |
| 3-phase 4-wire (L-N) current transformer     |                  | 6900                     | 8300                   | 13.8KV                 | 20kV                   | 22kV                   | 26.5kV                   | 53kV                     | 66kV                  | 80kV                  | 200kV                  | 440kV                   |
| RATIO 25/5 (5:1)                             | Normal Max. Min. | 500KW<br>650<br>325      | 600KW<br>800<br>400    | 1000KW<br>1200<br>600  | 1500KW<br>1500<br>750  | 1500KW<br>2000<br>1000 | 1500KW<br>2500<br>1250   | 3000KW<br>200<br>100     | 5000KW<br>200<br>100  | 6000KW<br>250<br>125  | 15MW<br>300<br>150     | 30MW<br>400<br>200      |
| RATIO 50/5 (10:1)                            | Normal Max. Min. | 1000KW<br>1200<br>600    | 1200KW<br>1500<br>750  | 2000KW<br>2500<br>1250 | 3000KW<br>3500<br>1750 | 3000KW<br>4000<br>2000 | 3500KW<br>5000<br>2500   | 8000KW<br>10MW<br>5000KW | 10MW<br>12<br>6000KW  | 12MW<br>15<br>7500KW  | 30MW<br>35<br>15       | 60MW<br>80<br>40        |
| RATIO 75/5 (15:1)                            | Normal Max. Min. | 1500KW<br>2000<br>1000   | 1800KW<br>2000<br>1000 | 3000KW<br>4000<br>2000 | 4000KW<br>5000<br>2500 | 5000KW<br>6000<br>3000 | 5000KW<br>7500<br>3000   | 10MW<br>15<br>7500KW     | 15MW<br>15<br>7500KW  | 15MW<br>20<br>10      | 45MW<br>50<br>25       | 100MW<br>125<br>50      |
| RATIO 100/5 (20:1)                           | Normal Max. Min. | 2000KW<br>2500<br>1250   | 2500KW<br>3000<br>1500 | 4000KW<br>5000<br>2500 | 6000KW<br>7500<br>3000 | 6000KW<br>8000<br>4000 | 7500KW<br>10MW<br>5000KW | 15MW<br>20<br>10         | 20MW<br>25<br>12.5    | 25MW<br>30<br>15      | 60MW<br>70<br>35       | 125MW<br>150<br>75      |
| RATIO 150/5 (30:1)                           | Normal Max. Min. | 3000KW<br>4000<br>2000   | 3500KW<br>4000<br>2000 | 6000KW<br>4000<br>2000 | 10MW<br>10<br>5000KW   | 10MW<br>12<br>6000KW   | 10MW<br>15<br>7500KW     | 20MW<br>30<br>15         | 30MW<br>35<br>15      | 35MW<br>40<br>20      | 90MW<br>100<br>50      | 200MW<br>250<br>100     |
| RATIO 200/5 (40:1)                           | Normal Max. Min. | 4000KW<br>5000<br>2500   | 4500KW<br>6000<br>3000 | 8000KW<br>5000<br>2500 | 12MW<br>15<br>7500KW   | 12MW<br>15<br>7500KW   | 15MW<br>20<br>10         | 30MW<br>40<br>20         | 35MW<br>50<br>25      | 50MW<br>60<br>30      | 100MW<br>150<br>75     | 250MW<br>300<br>150     |
| RATIO 300/5 (60:1)                           | Normal Max. Min. | 6000KW<br>8000<br>4000   | 7000KW<br>8000<br>4000 | 12MW<br>15<br>7.5      | 18MW<br>20<br>10       | 18MW<br>25<br>12.5     | 20MW<br>30<br>15         | 45MW<br>60<br>30         | 60MW<br>75<br>30      | 75MW<br>80<br>40      | 150MW<br>200<br>100    | 400MW<br>500<br>250     |
| RATIO 400/5 (80:1)                           | Normal Max. Min. | 8000KW<br>10MW<br>5000KW | 10MW<br>12<br>6000KW   | 15MW<br>20<br>10       | 24MW<br>30<br>15       | 25MW<br>30<br>15       | 30MW<br>40<br>20         | 60MW<br>80<br>40         | 80MW<br>100<br>50     | 100MW<br>120<br>60    | 200MW<br>300<br>150    | 500MW<br>600<br>300     |
| RATIO 600/5 (120:1)                          | Normal Max. Min. | 12MW<br>15<br>7500KW     | 15MW<br>18<br>10       | 25MW<br>30<br>15       | 35MW<br>40<br>20       | 40MW<br>50<br>25       | 45MW<br>60<br>30         | 90MW<br>120<br>60        | 100MW<br>150<br>75    | 150MW<br>180<br>75    | 350MW<br>450<br>225    | 800KW<br>1000<br>500    |
| RATIO 800/5 (160:1)                          | Normal Max. Min. | 15MW<br>20<br>10         | 20MW<br>25<br>12.5     | 30MW<br>40<br>20       | 50MW<br>60<br>30       | 50MW<br>60<br>30       | 60MW<br>80<br>40         | 120MW<br>150<br>75       | 150MW<br>200<br>100   | 200MW<br>200<br>100   | 500MW<br>600<br>300    | 1000MW<br>1200<br>600   |
| RATIO 1000/5 (200:1)                         | Normal Max. Min. | 20MW<br>25<br>12.5       | 25MW<br>30<br>15       | 40MW<br>50<br>25       | 50MW<br>60<br>30       | 60MW<br>80<br>40       | 75MW<br>100<br>50        | 150MW<br>200<br>100      | 200MW<br>250<br>125   | 250MW<br>300<br>150   | 600MW<br>750<br>300    | 1200MW<br>1500<br>750   |
| RATIO 1200/5 (240:1)                         | Normal Max. Min. | 25MW<br>30<br>15         | 30MW<br>35<br>20       | 50MW<br>60<br>30       | 60MW<br>80<br>40       | 80MW<br>100<br>50      | 100MW<br>120<br>60       | 175MW<br>200<br>100      | 250MW<br>300<br>150   | 300MW<br>350<br>175   | 750MW<br>900<br>450    | 1500MW<br>2000<br>1000  |
| RATIO 1500/5 (300:1)                         | Normal Max. Min. | 30MW<br>40<br>20         | 35MW<br>40<br>20       | 60MW<br>80<br>40       | 75MW<br>100<br>50      | 100MW<br>120<br>60     | 120MW<br>150<br>75       | 250MW<br>300<br>150      | 300MW<br>350<br>175   | 350MW<br>450<br>225   | 900MW<br>1000<br>500   | 2000MW<br>2500<br>1250  |
| RATIO 2000/5 (400:1)                         | Normal Max. Min. | 40MW<br>50<br>25         | 50MW<br>60<br>30       | 80MW<br>100<br>50      | 100MW<br>150<br>75     | 120MW<br>150<br>75     | 150MW<br>200<br>100      | 300MW<br>400<br>200      | 400MW<br>500<br>250   | 500MW<br>600<br>300   | 1000MW<br>1500<br>750  | 2500MW<br>3000<br>1500  |
| RATIO 3000/5 (600:1)                         | Normal Max. Min. | 60MW<br>80<br>40         | 75MW<br>80<br>40       | 100MW<br>150<br>75     | 150MW<br>200<br>100    | 200MW<br>250<br>125    | 200MW<br>300<br>150      | 400MW<br>500<br>250      | 600MW<br>750<br>350   | 700MW<br>900<br>450   | 1500MW<br>2000<br>1000 | 3500MW<br>5000<br>2500  |
| RATIO 4000/5 (800:1)                         | Normal Max. Min. | 80MW<br>100<br>50        | 100MW<br>125<br>60     | 150MW<br>200<br>100    | 200MW<br>300<br>150    | 250MW<br>300<br>150    | 300MW<br>400<br>200      | 500MW<br>800<br>400      | 800MW<br>1000<br>500  | 1000MW<br>1200<br>600 | 2000MW<br>3000<br>1500 | 500MW<br>6000<br>3000   |
| RATIO 5000/5 (1000:1)                        | Normal Max. Min. | 100MW<br>120<br>60       | 125MW<br>150<br>75     | 200MW<br>250<br>125    | 250MW<br>300<br>150    | 300MW<br>400<br>200    | 400MW<br>500<br>250      | 750MW<br>1000<br>500     | 1000MW<br>1200<br>600 | 1200MW<br>1500<br>750 | 3000MW<br>3500<br>1750 | 6000MW<br>8000<br>4000  |
| RATIO 6000/5 (1200:1)                        | Normal Max. Min. | 120MW<br>150<br>75       | 150MW<br>175<br>80     | 250MW<br>300<br>150    | 350KW<br>400<br>200    | 400MW<br>500<br>250    | 450MW<br>600<br>300      | 1000MW<br>1200<br>600    | 1200MW<br>1500<br>750 | 1500MW<br>1750<br>800 | 3500MW<br>4000<br>2000 | 8000MW<br>10000<br>5000 |


## AC Wattmeters

**Product Codes - 1-Element, Transformer Rated, 50/60Hz  
Integral Transducer - Accuracy 1.0%, 50/60Hz**




**AC Wattmeter**


**Fig. A1** Models 007-215  
Wattmeter Single Phase




**Fig. A2** Models 078-215  
Wattmeter Single Phase



**Fig. B1** Models 007-218 Wattmeter  
3-Phase, 3-Wire Unbalanced Load



**Fig. B2** Models 078-218 Wattmeter  
3-Phase 3-Wire Unbalanced Load



| Phases | Wires | Amperes<br>1VA max. burden | Volts<br>1 VA max. burden | Scaling | 4 1/2" square flange     |                                   |
|--------|-------|----------------------------|---------------------------|---------|--------------------------|-----------------------------------|
|        |       |                            |                           |         | Std. case catalog number | Std. case hi-shock catalog number |
| 1      | 2     | 5                          | 120V                      | To suit | •007-215A-QQ**-C7        | 078-215J-QQ**-C6                  |
| 1      | 2     | 5                          | 240V                      | To suit | 007-215A-QS**-C7         | 078-215J-QS**-C6                  |

For connection diagram refer to Figure A1 & A2.

**Product Codes - 2 -Element, Transformer Rated, 50/60Hz  
Taut Band Integral Transducer - Accuracy 1.0%, 50/60Hz**

|   |   |   |      |         |                   |                  |
|---|---|---|------|---------|-------------------|------------------|
| 3 | 3 | 5 | 120V | To suit | •007-218A-QQ**-C7 | 078-218J-QQ**-C6 |
| 3 | 3 | 5 | 208V | To suit | •007-218A-QR**-C7 | 078-218J-QR**-C6 |
| 3 | 3 | 5 | 240V | To suit | •007-218A-QS**-C7 | 078-218J-QS**-C6 |
| 3 | 3 | 5 | 380V | To suit | •007-218A-QX**-C7 | 078-218J-QX**-C6 |
| 3 | 3 | 5 | 480V | To suit | •007-218A-QT**-C7 | 078-218J-QT**-C6 |


For connection diagram refer to Figure B1 & B2.

**Product Codes - 2 1/2 - Element, Transformer Rated, 50/60Hz  
Taut Band Integral Transducer - Accuracy 1.0%, 50/60Hz**


|   |   |   |      |         |                   |                  |
|---|---|---|------|---------|-------------------|------------------|
| 3 | 4 | 5 | 69V  | To suit | •007-219A-QL-C7** | 078-219J-QL**-C6 |
| 3 | 4 | 5 | 120V | To suit | •007-219A-QQ-C7** | 078-219J-QQ**-C6 |
| 3 | 4 | 5 | 277V | To suit | •007-219A-QY-C7** | 078-219J-QY**-C6 |
| 3 | 4 | 5 | 346V | To suit | •007-219A-QZ-C7** | 078-219J-QZ**-C6 |

For connection diagram refer to Figure C1 & C2.

**Fig. C1** Models 007-219 Wattmeter  
3-Phase 4-Wire Unbalanced Load



**Fig. C2** Models 078-219 Wattmeter  
3-Phase 4-Wire Unbalanced Load



- \* Other scales are available.
- \*\* Specify CT (Current Transformer) and VT (Voltage Transformer) ratios if used and preferred scale at time of ordering.
- c-UL-us certified.

## AC VArmeters

**Product Codes - Element, Transformer Rated, 50/60Hz  
Integral Transducer - Accuracy 1.0%, 50/60Hz**

| Measured System  |   |   |   | Scaling | 4 1/2" square flange     |                                   |                  |
|--|---|---|---|---------|--------------------------|-----------------------------------|------------------|
|  |   |   |   |         | Std. case catalog number | Std. case hi-shock catalog number |                  |
| Phases<br>Wires<br>Amperes<br>1VA max. burden<br>Volts<br>1 VA max. burden | 3 | 3 | 5 | 120V    | To suit                  | •007-31LA-QQ**-C7                 | 078-31LJ-QQ**-C6 |
|  | 3 | 3 | 5 | 208V    | To suit                  | •007-31LA-QR**-C7                 | 078-31LJ-QR**-C6 |
|  | 3 | 3 | 5 | 240V    | To suit                  | •007-31LA-QS**-C7                 | 078-31LJ-QS**-C6 |
|  | 3 | 3 | 5 | 380V    | To suit                  | •007-31LA-QX**-C7                 | 078-31LJ-QX**-C6 |
|  | 3 | 3 | 5 | 480V    | To suit                  | •007-31LA-QT**-C7                 | 078-31LJ-QT**-C6 |

For connection diagram refer to Figure D1 & D2.

**Product Codes - 2 1/2-Element, Transformer Rated, 50/60Hz  
Taut Band Integral Transducer - Accuracy 1.0%, 50/60Hz**

|   |   |   |      |         |                   |                  |
|---|---|---|------|---------|-------------------|------------------|
| 3 | 4 | 5 | 120V | To suit | •007-31UA-QQ**-C7 | 078-31UJ-QQ**-C6 |
| 3 | 4 | 5 | 208V | To suit | •007-31UA-QR**-C7 | 078-31UJ-QR**-C6 |
| 3 | 4 | 5 | 480V | To suit | •007-31UA-QT**-C7 | 078-31UJ-QT**-C6 |

For connection diagram refer to Figure D1 & D2.

- \* Other scales are available.
- \*\* Specify CT (Current Transformer) and VT (Voltage Transformer) ratios if used and preferred scale at time of ordering.
- c-UL-us certified.

## DC Transducer Indicators

**Product Codes**

| Rating           | Scaling* | 4 1/2" square flange     |                                   |
|------------------|----------|--------------------------|-----------------------------------|
|                  |          | Std. case catalog number | Std. case hi-shock catalog number |
| Watts 1mA        | To suit  | •007-055A-FA**           | 078-055J-FA**                     |
| VARS 1mA         | To suit  | •007-056A-FA**           | 078-056J-FA**                     |
| Frequency 1mA    | To suit  | •007-053A-FA**           | 078-053J-FA**                     |
| Power factor 1mA | To suit  | •007-054A-FA**           | 078-054J-FA**                     |
| AC amps 1mA      | To suit  | •007-05AA-FA**           | 078-05AJ-FA**                     |
| AC volts 1mA     | To suit  | •007-05VA-FA**           | 078-05VJ-FA**                     |
| Speed 1mA        | To suit  | •007-052A-FA**           | 078-052J-FA**                     |
| VA 1mA           | To suit  | •007-057A-FA**           | 078-057J-FA**                     |


- \*Case types 007/078 use 10-32 UNF terminals.
- \*\*Specify scale. Input: 1mA DC for 4/20mA change "FA" to "HG".
- c-UL-us certified.

For use with the following transducers: Watts, Vars, Frequency, Power Factor, AC amperes, AC volts and temperature.




**AC VArmeter**

**Fig. D1** Models 077-31L VArmeter  
3-Phase 3-Wire Unbalanced Load



**Fig. D2** Models 078-31L VArmeter  
3-Phase 3-Wire Unbalanced Load

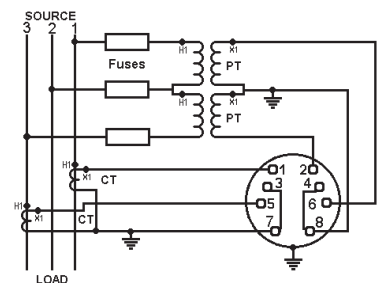

**DC Transducer Indicator**