

minifast® Explosionproof Receptacles with Leads, 2-Wire Analog or HART Control Circuits

- Male Receptacles
- NEMA 1, 3, 4, 6P and IEC IP 67 Protection



Housing Style	Part Number	Lead Specs	Features	Pinout
<p>12</p>	P-RSFV 30 EX-*/14.75/NPT	UL, CSA 2x18 AWG 105°C 600 V, 9 A	Explosionproof Receptacle, 3/4-14NPT Threads	1. BU 2. BN 3. N/C
	P-RSFV 30D EX-*/14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	Explosionproof Receptacle, 3/4-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY
	P-RSFV 40 EX-*/14.75/NPT	UL, CSA 3x18 AWG 105°C 600 V, 9 A	Explosionproof Receptacle, 3/4-14NPT Threads	1. BU 2. BN 3. N/C 4. GN/YE
	P-RSFV 40D EX-*/14.75/NPT	UL, CSA 4x18 AWG 105°C 600 V, 9 A	Explosionproof Receptacle, 3/4-14NPT Threads, Drain Wire	1. BU 2. BN 3. GY 4. GN/YE


See page K64 for dimensional drawings.

* Length in meters. Standard lead length is 0.3 meters. Consult factory for other lengths.
Standard housing material is 316 stainless steel.

Note: See **TURCK** Control Drawing QCF-00147 (FM) or Ni-2.404 (CSA) at www.turck.com/fmcd for guidance on installation in hazardous locations.

minifast® Explosionproof Receptacles with Leads, 2-Wire Analog or HART Control Circuits


9

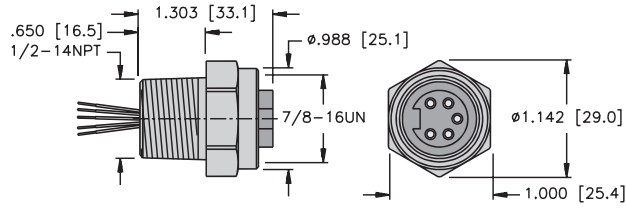

P-RKFV .. EX-*/14.5/NPT

Page K73


10

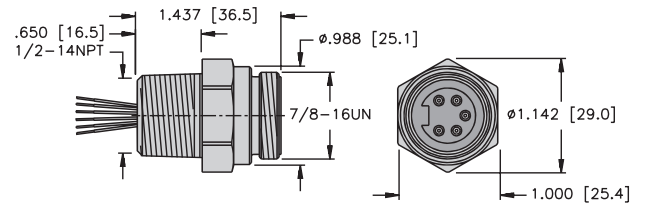

P-RSFV .. EX-*/14.5/NPT

Page K74


11

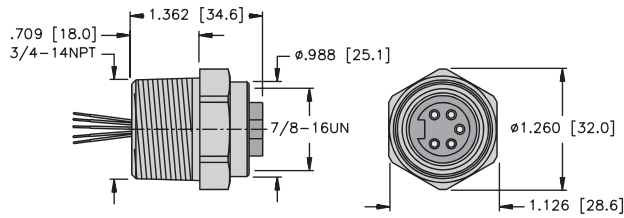

P-RKFV .. EX-*/14.75/NPT

Page K75

12

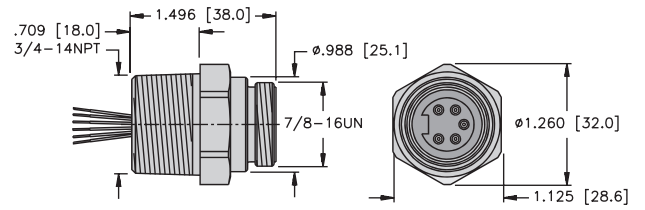

P-RSFV .. EX-*/14.75/NPT

Page K76