
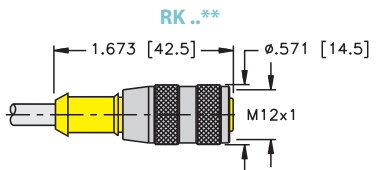
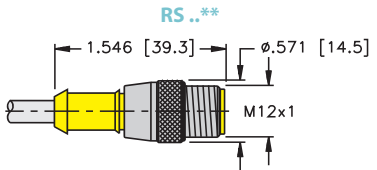





- NEMA 1, 3, 4, 6P
- IEC IP68 Protection
- 60 VAC/75 VDC, 2 A



Connector Style	Female Part Number	Male Part Number	Features	Pinout
 	RK 10T-*	RS 10T-*	AWM PVC Grey, 10x24 AWG, 105°C, 6.2 mm OD, Cable #RF51004-*M [†] , flexlife®	<p>Female</p>  <p>Male</p> 
	RK 10T-*/S90	RS 10T-*/S90	AWM TPU Grey, 10x24 AWG, 90°C, 6.2 mm OD, Cable #RF51005-*M [†] , Cut/Abrasion Immune	<p>1. WH 2. BN 3. GN 4. YE 5. GY 6. PK 7. BU 8. RD 9. OG 10. TN</p>
	RK 12T-*	RS 12T-*	AWM PVC Grey, 12x24 AWG, 105°C, 6.3 mm OD, Cable #RF50991-*M [†] , flexlife®	<p>Female</p>  <p>Male</p> 
	RK 12T-*/S90	RS 12T-*/S90	AWM TPU Grey, 12x24 AWG, 90°C, 6 mm OD, Cable #RF50990-*M [†] , Cut/Abrasion Immune	<p>1. WH 2. BN 3. GN 4. YE 5. GY 6. PK 7. BU 8. RD 9. OG 10. TN 11. BK 12. VT</p>

Cordsets

* Length in meters. Standard cable lengths are 2, 4, 6, 8 and 10 meters. Consult factory for other lengths.
 ** Standard coupling nut material is nickel plated brass "RK .."; "RKK .." indicates nylon and "RKV .." indicates stainless steel.
 † See Section N for **reelfast**® cable information.