

Compact panel meters designed to fit standard 17/32" switch knock outs.

Specification

| | |
|------------------------|---|
| Enclosure Code: | IP42 (IEC 529) |
| System Frequencies: | Elapsed Time Meter: 50 or 60Hz |
| System Voltage: | Elapsed Time Meter: 110/130V A.C., 200/250V A.C., 6 or 12V D.C. |
| Scale: | Angle: 90 degrees. Length: 1 inch (26mm) |
| Operating Temperature: | -10°C to +55°C (15 to 130°F). |
| Bezel Window: | Toughened glass |
| Fixing on Panel: | Simple clamp fixing |
| Approvals: | EMC and LVD, ABS American Bureau of Shipping |

Features

- Compact size
- Fits standard 17/32 inch switch knock out
- Toughened glass window

Benefits

- Simple clamp fixing
- Easy installation on replacement
- Panel space saving
- Customised options and features

Applications


- Switchgear
- Distribution systems
- Generator sets
- Control panels
- Energy management
- Building management
- Utility power monitoring
- Process control
- Motor control

Approvals

ABS American Bureau of Shipping approvals 93-LD 17806-X


Dimensions

Elapsed Time Meters

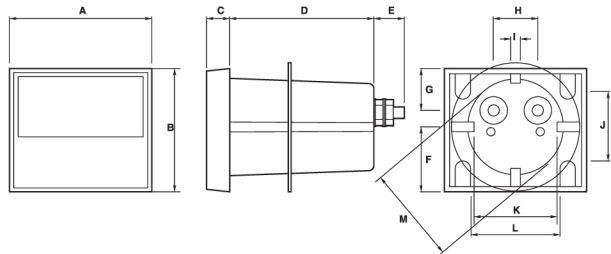

| | A | B | C | D | E | F | G | H | I | J | K | L | M |
|----|------|------|------|------|------|------|------|------|------|------|------|------|------|
| in | 1.84 | 1.59 | 0.34 | 1.75 | 0.51 | 0.86 | 0.24 | 0.51 | 0.16 | 1.08 | 1.08 | 1.18 | 1.18 |
| mm | 46.8 | 40.4 | 8.6 | 44.3 | 13 | 21.9 | 6 | 13 | 4.1 | 27.5 | 27.5 | 30 | 30 |

Panel cut-out

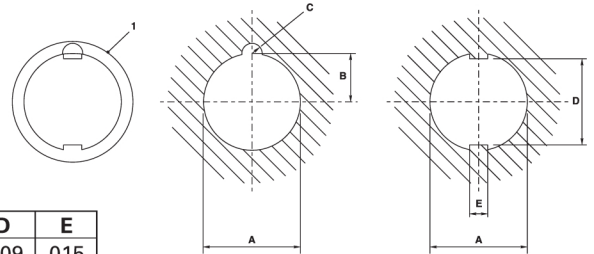

| | A | B | C | D | E |
|----|------|------|------|------|------|
| in | 1.2 | 0.57 | 0.25 | 1.09 | 0.15 |
| mm | 30.5 | 14.5 | 6.4 | 27.8 | 3.9 |

Elapsed Time Meter

Product Codes

| Input | Scale | Catalogue No. |
|---------------------|----------|------------------|
| 110/130V A.C., 50Hz | 99999.99 | 549-155A-PNC5-ZH |
| 110/130V A.C., 60Hz | 99999.99 | 549-156A-PNC6-ZH |
| 200/250V A.C., 50Hz | 99999.99 | 549-155A-RNC5-ZH |
| 200/250V A.C., 60Hz | 99999.99 | 549-156A-RNC6-ZH |
| 6V D.C., D.C. | 99999.99 | 549-151A-LWZH |
| 12V D.C., D.C. | 99999.99 | 549-151A-MUZH |